

How to download Bit Torrent to USB Device via Vigor Router

Download Bit Torrent (BT)

1. Plug USB storage disk into the USB slot of Vigor2130. Access into the web configuration interface of Vigor2130.
2. Open **USB Application>>Disk Status**.
3. Wait for few seconds for the router to detect it. If the disk is detected, it will be shown as the following figure.

USB Application >> Disk Status

Disk Status

Safely Remove Disk	Manufacturer	Model	Size	Free Capacity	Status
<input type="checkbox"/>	Generic	Flash Disk	2011M	1.7G	In use

Update

Refresh Devices

4. Make sure that WAN connection has been established.

Online Status

Auto-refresh

Refresh

System Status



System Uptime: 0d 02:00:14

LAN Status

IP Address	TX Packets	RX Packets	TX Bytes	RX Bytes
192.168.1.1	4063	4568	1494410	673774

IPv6 Address

2000::1/64 (Global)

fe80::200:ff:fe00:0/64 (Link)

WAN Status

IP	GW IP	Mode	Up Time
172.16.3.102	172.16.1.1	Static IP	0d 00:37:21

IPv6 Address

fe80::200:ff:fe00:0/64 (Link)

Primary DNS	Secondary DNS	TX Packets	RX Packets	TX Bytes	RX Bytes
168.95.1.1		1214	30301	155002	2321747

- Open **USB Application >> Bit Torrent Download**. Click **Install** to install BT module from Internet to USB device.

USB Application >> Bit Torrent Download

Press the button to install BT module.
Note: Internet connection is required!



- Simply wait for a few minutes to finish the installation.

USB Application >> BT Install

BT Installation Output



BT module is being installed to USB device, please wait a moment during installation
Note: Please don't leave the page till installation process is done.



- When the installation is finished, the following page will be displayed.

USB Application >> Bit Torrent Download

BT Default General Settings

BT Function	<input checked="" type="radio"/> Enable <input type="radio"/> Disable	Start Stop	
Listening Port	<input type="text" value="49152"/> - <input type="text" value="65535"/> (1025 - 65535)		
Max Peer Connections	<input type="text" value="60"/> (1 - 100)		

Traffic Control

Rate Limit Enable	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Max Download Rate	<input type="text" value="100"/> KBps(0 - 2048)
Max Upload Rate	<input type="text" value="20"/> KBps(0 - 2048)


Web Client

Authentication Enable	<input type="radio"/> Enable <input checked="" type="radio"/> Disable	
User Name	<input type="text"/>	
Password	<input type="text"/>	
Web Client Port	<input type="text" value="9091"/>	
Remote Management	<input type="radio"/> Enable <input checked="" type="radio"/> Disable	


Note: Format usb disk as NTFS will be more reliable.




8. Click the link of **Open Web Client** to open another window.

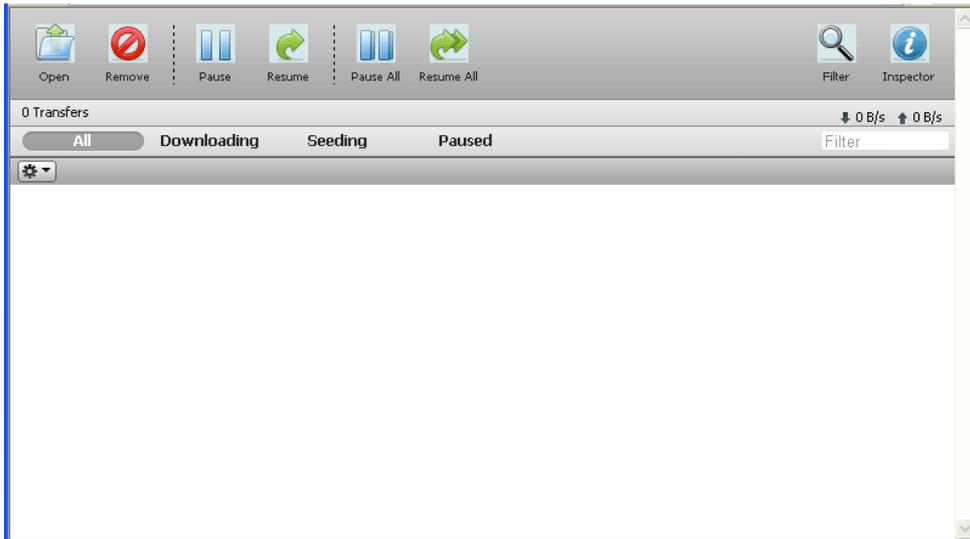

9. Click **Open**. A pop up dialog will appear.

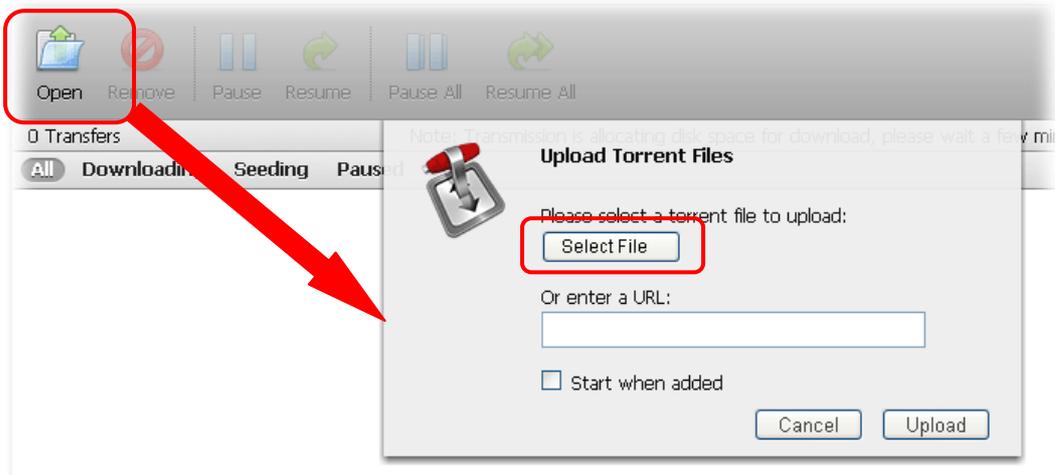


10. Click **Select File** to open the following dialog. Choose the seed of Bit Torrent file and click **Open**.

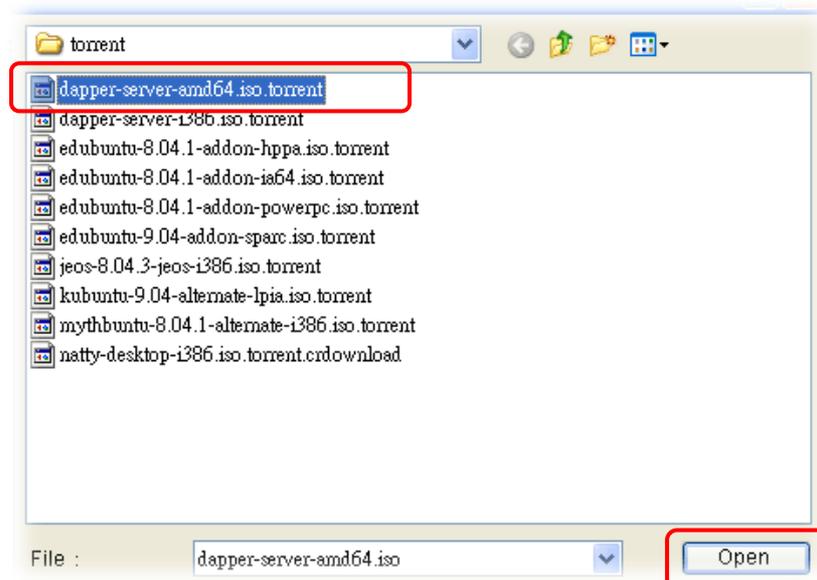

Note: Before uploading torrent files to the router, please search from Internet and store the seed of the Bit Torrent on our hard disk first.

- Next, the router will start to download the file to the USB disk. You can add new seed of torrent file one by one by clicking **Open** to let the router download them at one time.

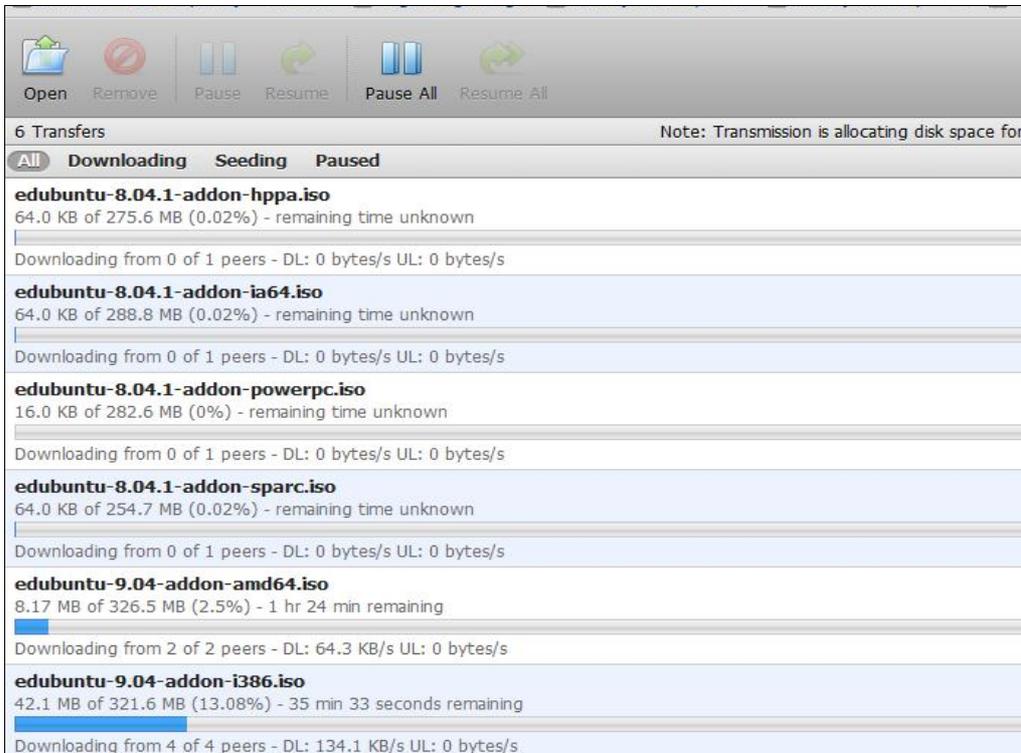

Share the file after downloading completed

1. Access into Vigor2130 web configuration interface and open **USB Application >> USB General Settings**. Enable the **Disk Sharing** function by checking the box and click **OK**.

USB Application >> USB General Settings

USB General Settings

Enable FTP	<input checked="" type="checkbox"/>
Enable Disk Sharing	<input checked="" type="checkbox"/>
Workgroup Name	WORKGROUP

2. Open **USB Application >> Disk Shares**. Click **Add a New Entry**.

USB Application >> Disk Shares

Disk Shares

Share Name	Comment	Path	Visible
No Shares			

3. In the following screen, add a new entry for the sharing folder/name. In this case, we give a name of **bt_folder** as **Share Name** for home folder (“/”). Click **OK**.

USB Application >> Disk Share

Add Disk Share

Identification

Share Name	bt_folder
Comment	bt_folder


Settings

Volume	Generic - Flash Disk - 2010M - PORT 1
Home Folder	/
Visible	<input type="checkbox"/>


Access Rule

Access	All Users Read-write
--------	----------------------


4. Now, **PCs in LAN** connected to Vigor2130 can open a browser from his / her computer. Simply type “**\\192.168.1.1**” in the field of **Address** and then click **Go**.

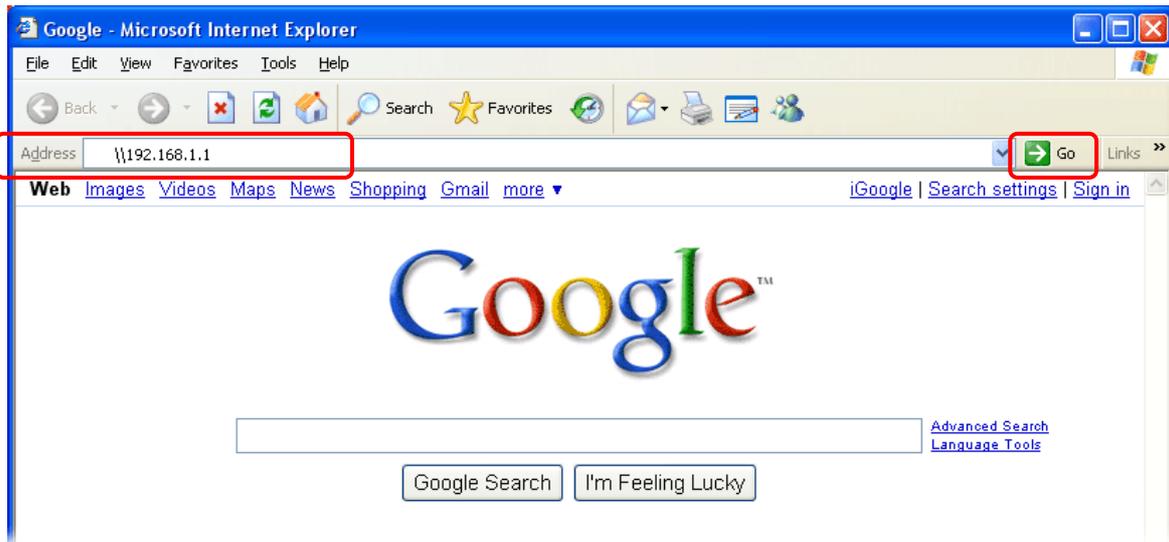


5. The sharing disk with the name of “**bt_folder**” created above will be shown as the following figure.

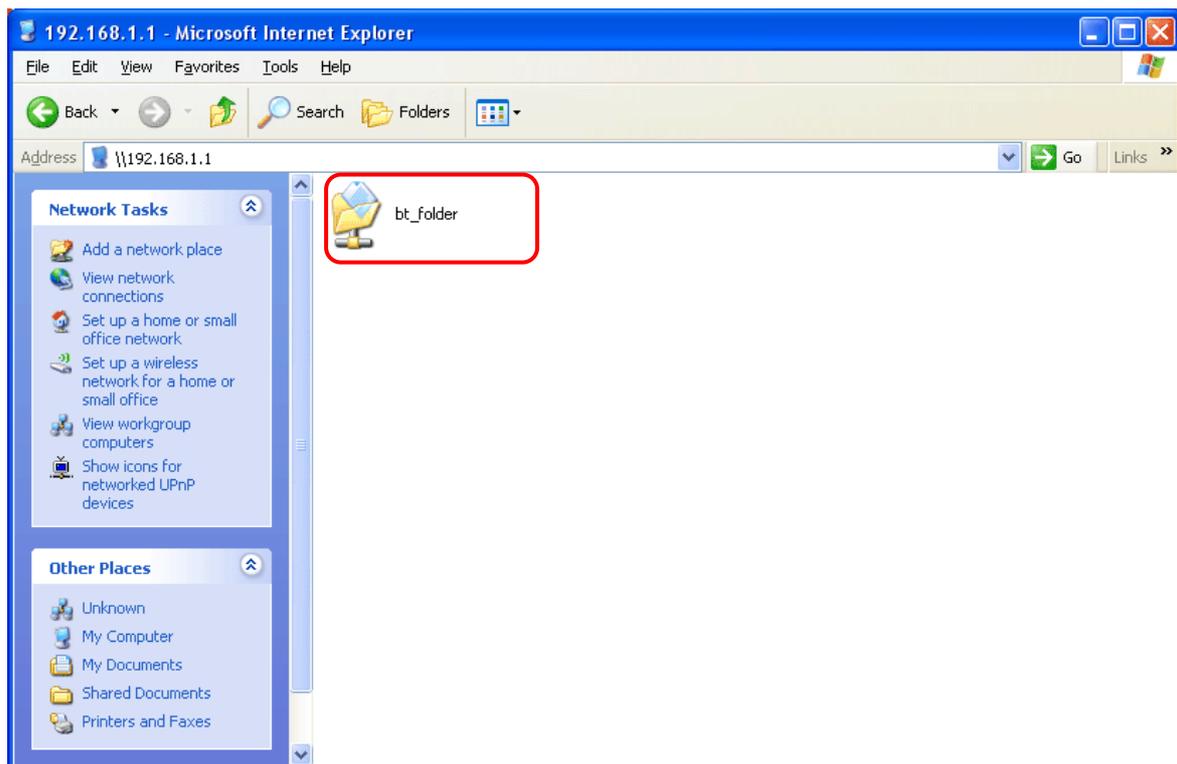

6. Double click **bt_folder** to view the files in the disk.

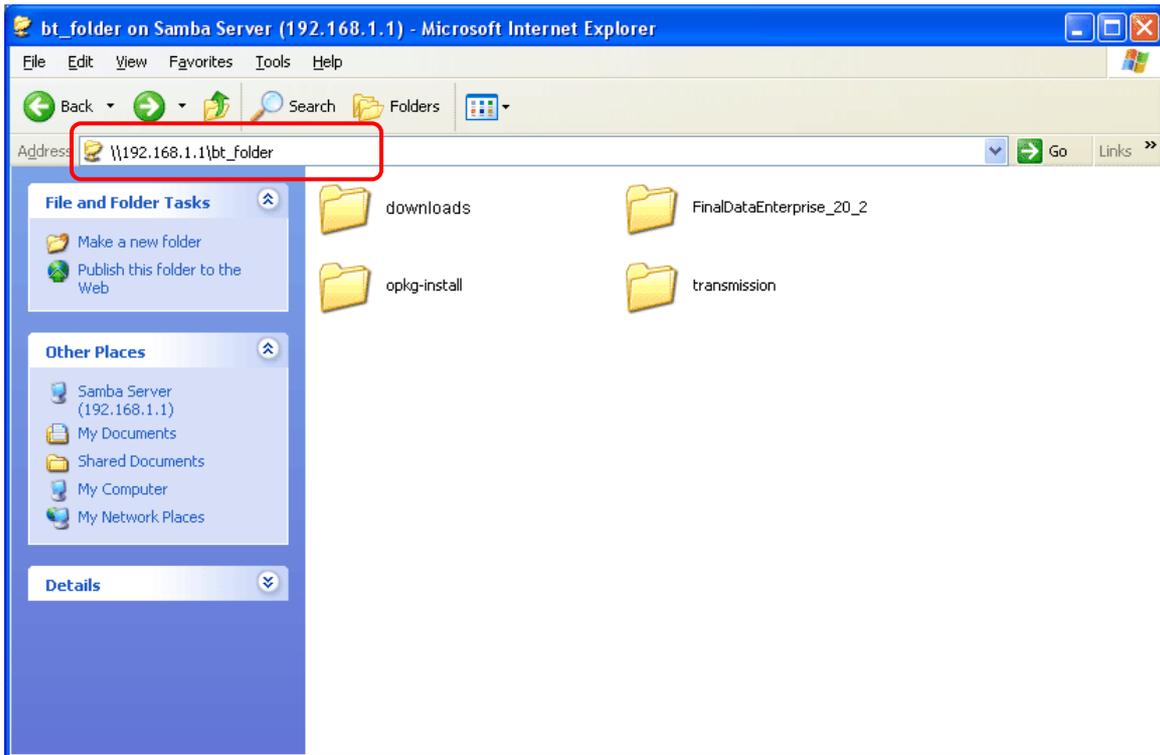

7. If you want to check the Bit Torrent files downloaded from Internet to USB disk, access into **bt_folder>>downloads**.

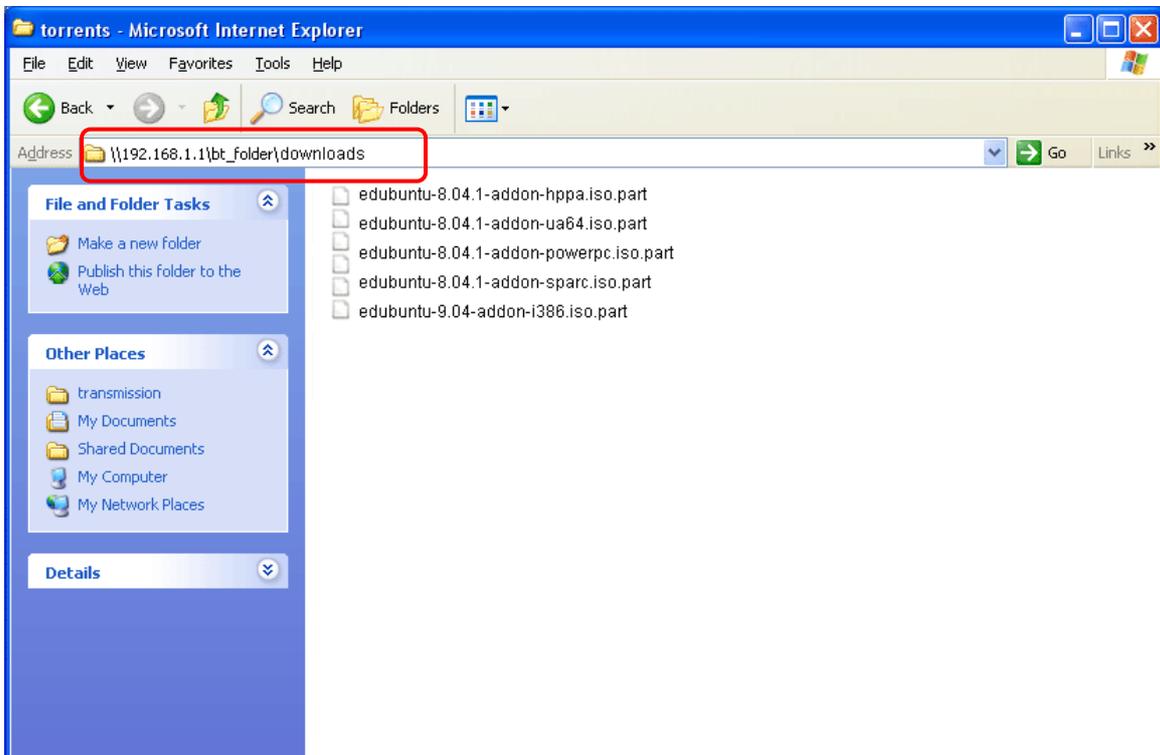

(Note: While the file is downloading, the file extension name will be “part”.)